

Output Cable CO10-SE:



Wire Color	Output Signals
Yellow	X axis
Green	Y axis
Gray	Z axis
Brown	GND
Black	Cable Shield

Figure 1. Output Signals Cable CO10-SE

NOTES:

- The connector metal case is connected to the cable shield.
- The wires at the end of the cable are terminated with "4mm Standard Banana Plug Connector".


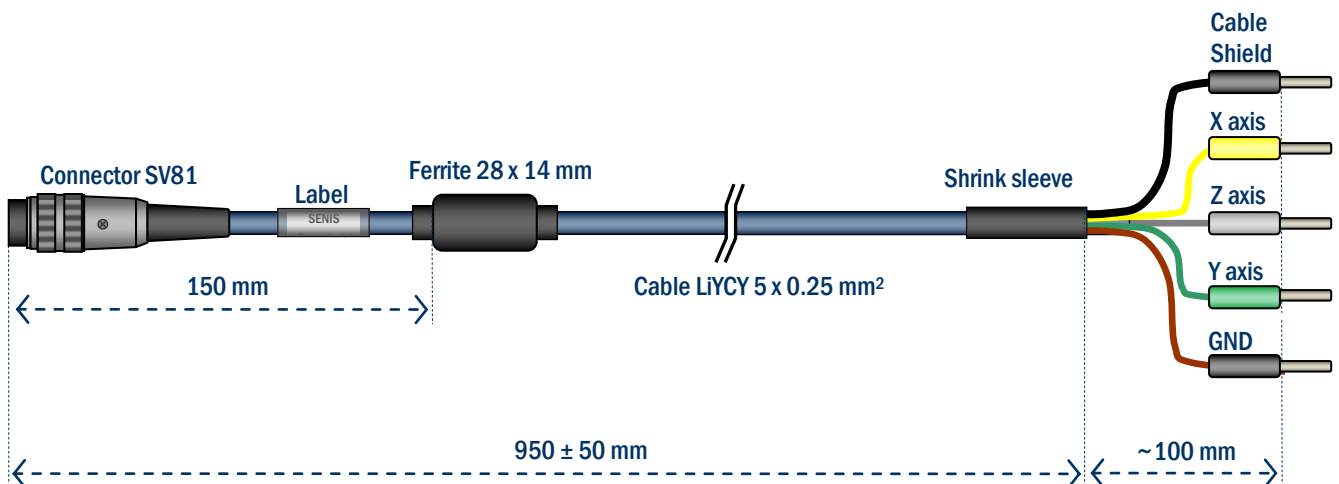


Figure 2. Dimensions and tolerances of the CO10-SE signal cable



Connector SV81 _output pins layout:

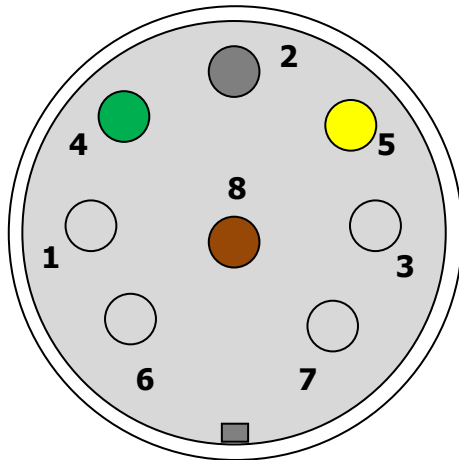

Solderig side view

Pin no.	Output signal	Wire color
1	Not Used	
2	Z axis	grey
3	Not Used	
4	Y axis	green
5	X axis	yellow
6	Not Used	
7	Not Used	
8	GND	brown
	Cable Shield	black



NOTES:

- This signals cable version is applicable with the SENIS AC analog magnetic field transducer type 3DACMT.

Distributed by: GMW Associates. 955 Industrial Road, San Carlos, CA, 94070, USA
PHONE: +1-650-802-8292 FAX: +1-650-802-8298 EMAIL: sales@gmw.com WEB: www.gmw.com

Ref.No.: DS401 CO10-SE
Rev:1.0. 23.01.2019.

PHONE +41 44 508 70 29
FAX +41 43 205 26 38
E-MAIL info@senis.ch

SENIS AG
Neuhofstrasse 5a
6340 Baar, Switzerland

The information contained in this document is the property of Senis AG.
Any reproduction in part or as a whole without the written permission of Senis AG is prohibited.

