



CryoMag[®]

Three-Axis Magnetic Field Sensors

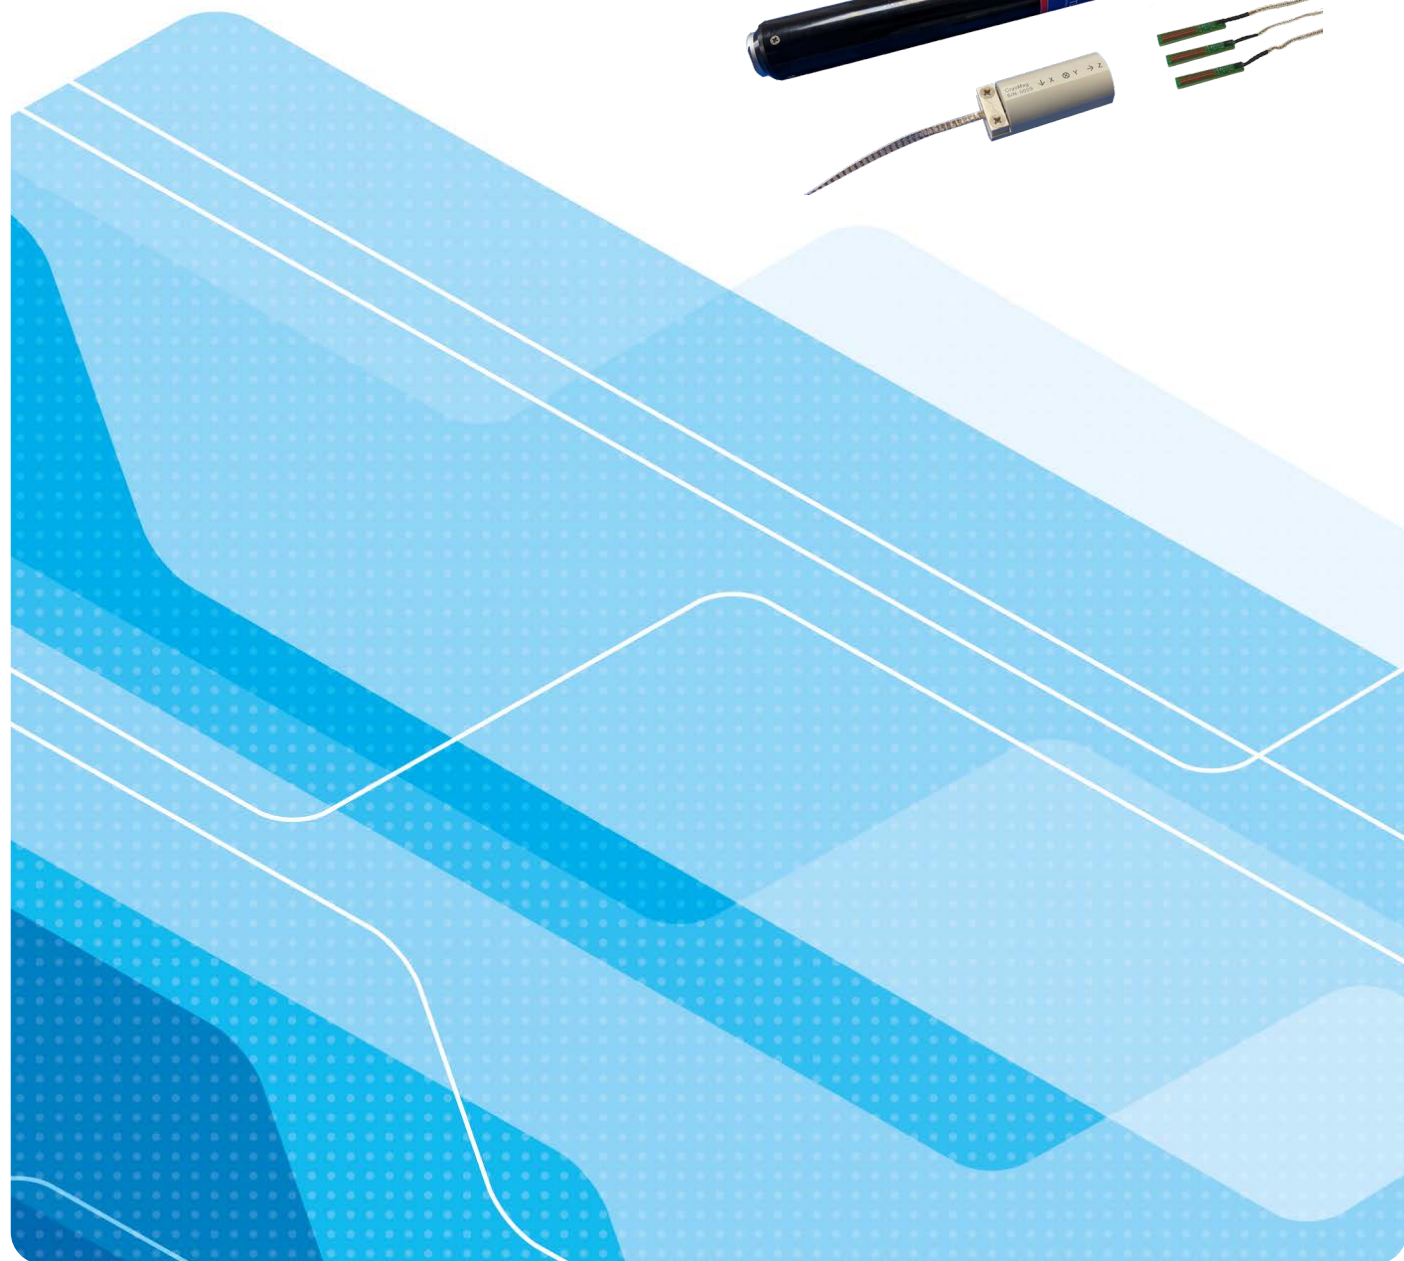

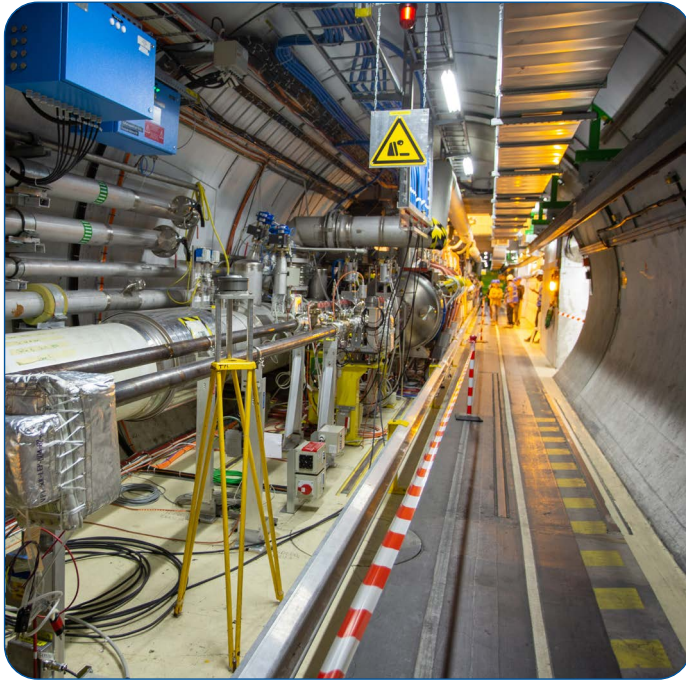

CryoMag® Three-Axis Magnetic Field Sensors

CryoMag sensors provide high precision measurements of static and alternating magnetic fields at temperatures down to 2K. They are available with standard 3-axis probe, or 3 single-axis sensor heads.

These sensors are ideal for use in cryostats for superconducting radio frequency cavities, in quantum computing applications, and other low temperature environments and applications.



Bartington is a registered trade mark of Bartington Holdings Limited in the following territories: Argentina, Australia, Brazil, Canada, Chile, China, European Union, Hong Kong, Iceland, India, Israel, Japan, Malaysia, Mexico, New Zealand, Norway, Russia, Singapore, South Korea, Switzerland, Taiwan, Turkey, United Kingdom, United States of America, and Vietnam.

Bartington is used under licence by Bartington Instruments Limited.

CryoMag is a registered trade mark of Bartington Holdings Limited in the following territories: United Kingdom, European Union, Japan, United States of America.

CryoMag is used under licence by Bartington Instruments Limited.

Features

- Operating temperature down to 2K
- Noise level down to $<20\text{pTrms}/\sqrt{\text{Hz}}$ at 1Hz
- Frequency response from DC to 1kHz
- Measuring ranges of ± 70 , ± 100 , ± 250 and $\pm 500\mu\text{T}$

Typical Applications

- Magnetic field monitoring in cryostats and other low temperature environments
- Use as feedback sensors in active magnetic field cancellation systems

Product Identification

Product Name	Sensor Head Type	Measuring Range
CryoMag	No code = Standard 3-axis Probe IE = 3x independent single axis sensor heads	70 = $\pm 70\mu\text{T}$ 100 = $\pm 100\mu\text{T}$ 250 = $\pm 250\mu\text{T}$ 500 = $\pm 500\mu\text{T}$

For example: CryoMag-IE250 = A $\pm 250\mu\text{T}$ range 3-axis CryoMag with individual sensor heads.




CryoMag® Specification

Performance				
Number of axes	Three			
Polarity	+ve when pointing North			
Analogue outputs	±10V single-ended (0V = zero-field)			
Full Scale Measuring Ranges	±70µT	±100µT	±250µT	±500µT
Scaling calibration error	<0.5%			
Scaling Temperature Coefficient	<±100ppm	<±125ppm	<±175ppm	<±200ppm
Linearity error	0.0015% (least squares fit)			
Frequency response	DC to 1kHz (±5%)			
Bandwidth (-3dB)	>2kHz (-11dB/octave roll-off)			
Noise	<20pTrms/√Hz at 1Hz			
Zero field offset	±30nT	±30nT	±40nT	±50nT
Offset Temperature Coefficient	+0.8nT/°C	+0.8nT/°C	+1.5nT/°C	+1.5nT/°C
Perming (magnetisation hysteresis)	<2nT at 1x Full-scale, when powered			
Orthogonality error between axes				
CryoMag	<±0.1°			
CryoMag-IE	N/A			
Excitation breakthrough	<5mV pk-pk at 15.625kHz typical			
Start-up time	<100ms			
Warm-up time	15 minutes to meet specifications for scaling <30 minutes to meet specifications for noise			

Environmental		
Operational temperature range	Probe + probe harness	-271 to +70°C
	Electronics + interconnection block	0 to +70°C (dynamic cable) -40 to +70°C (static cable)
Storage temperature range	-40 to +60°C	
Vacuum	10e-6 mBar	
IP Rating	Probe + Interconnection Block	IP40
	Electronics Enclosure	IP65 (Unmated Connector)
Humidity - electronics	Up to 90% RH, non-condensing	
Compliance	BS EN 61326-1:2013 and RoHS	

Mechanical	
Construction	Two Part
Probe Enclosure Material Standard IE	PEEK GF30 FR4 + Stycast 1266 Epoxy
Probe Dimensions Standard IE	21mm Diameter x 50mm Long 7 x 5 x 38mm typical
Probe Harness Material	24-Way Cryogenic Loom (Standard CryoMag) 8-Way Cryogenic Loom (Cryomag-IE) Dia 0,1mm Beryllium-Copper (BeCu) Cores; Polyester Insulation 3.5mm Max Loom Diameter (Folded)
Dimensions – Electronics Enclosure	25.4mm Diameter x 220mm Long
Weight	320g
Connector	Fischer AL-1731-DEU-1031-A010-SR-11-11-G-12

Electrical	
Supply Voltage	± 12 to 17V
Zero Field Current Consumption – Positive	35 to 41mA
Zero Field Current Consumption – Negative	13 to 17mA
Power Supply Rejection Ratio	120dB
Power-on surge	+90mA, -25mA, 20ms
Analogue Output	10V
Output Impedance	10 Ω
Maximum cable length	1.5km

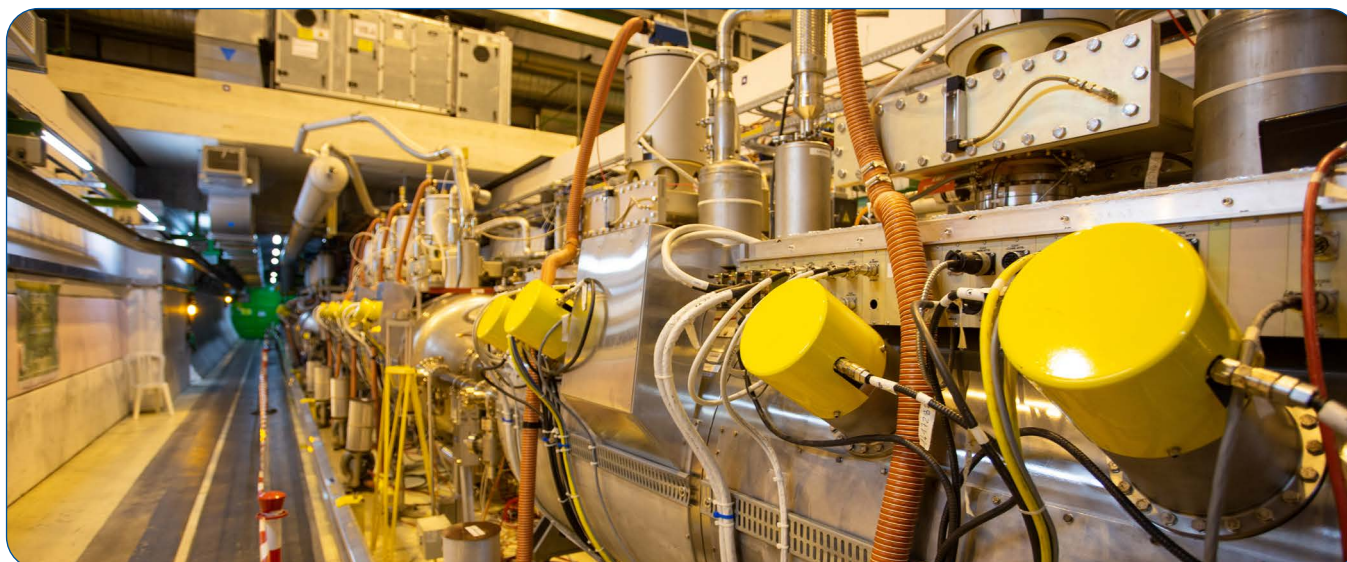

CryoMag® Three-Axis Magnetic Field Sensors

Cable

Interconnect Cable	CryoMag Cable PM4721
--------------------	----------------------

Accessories

CryoMag sensor head mounting jig	CryoMag-BR
----------------------------------	------------

Compatibility

CU1 Control Unit	Use CryoMag Cable PM4721
DecaPort	Use CryoMag Cable PM4721
DecaPSU	Use CryoMag Cable PM4721 with adaptor cable PM3979
PSU1 and Magmeter-2	Use CryoMag Cable PM4721
SCU1	Use CryoMag Cable PM4721
Spectramag-6	Use CryoMag Cable PM4721





The specifications of the products described in this brochure are subject to change without prior notice.

Bartington Instruments Ltd
5, 8, 10, 11 & 12 Thorney Leys Business Park
Witney, Oxford OX28 4GE. England

Telephone: +44 (0)1993 706565
Email: sales@bartington.com

 **Bartington**[®]
Instruments