


Grad-01-1000L

Single Axis Fluxgate Magnetic Gradiometer

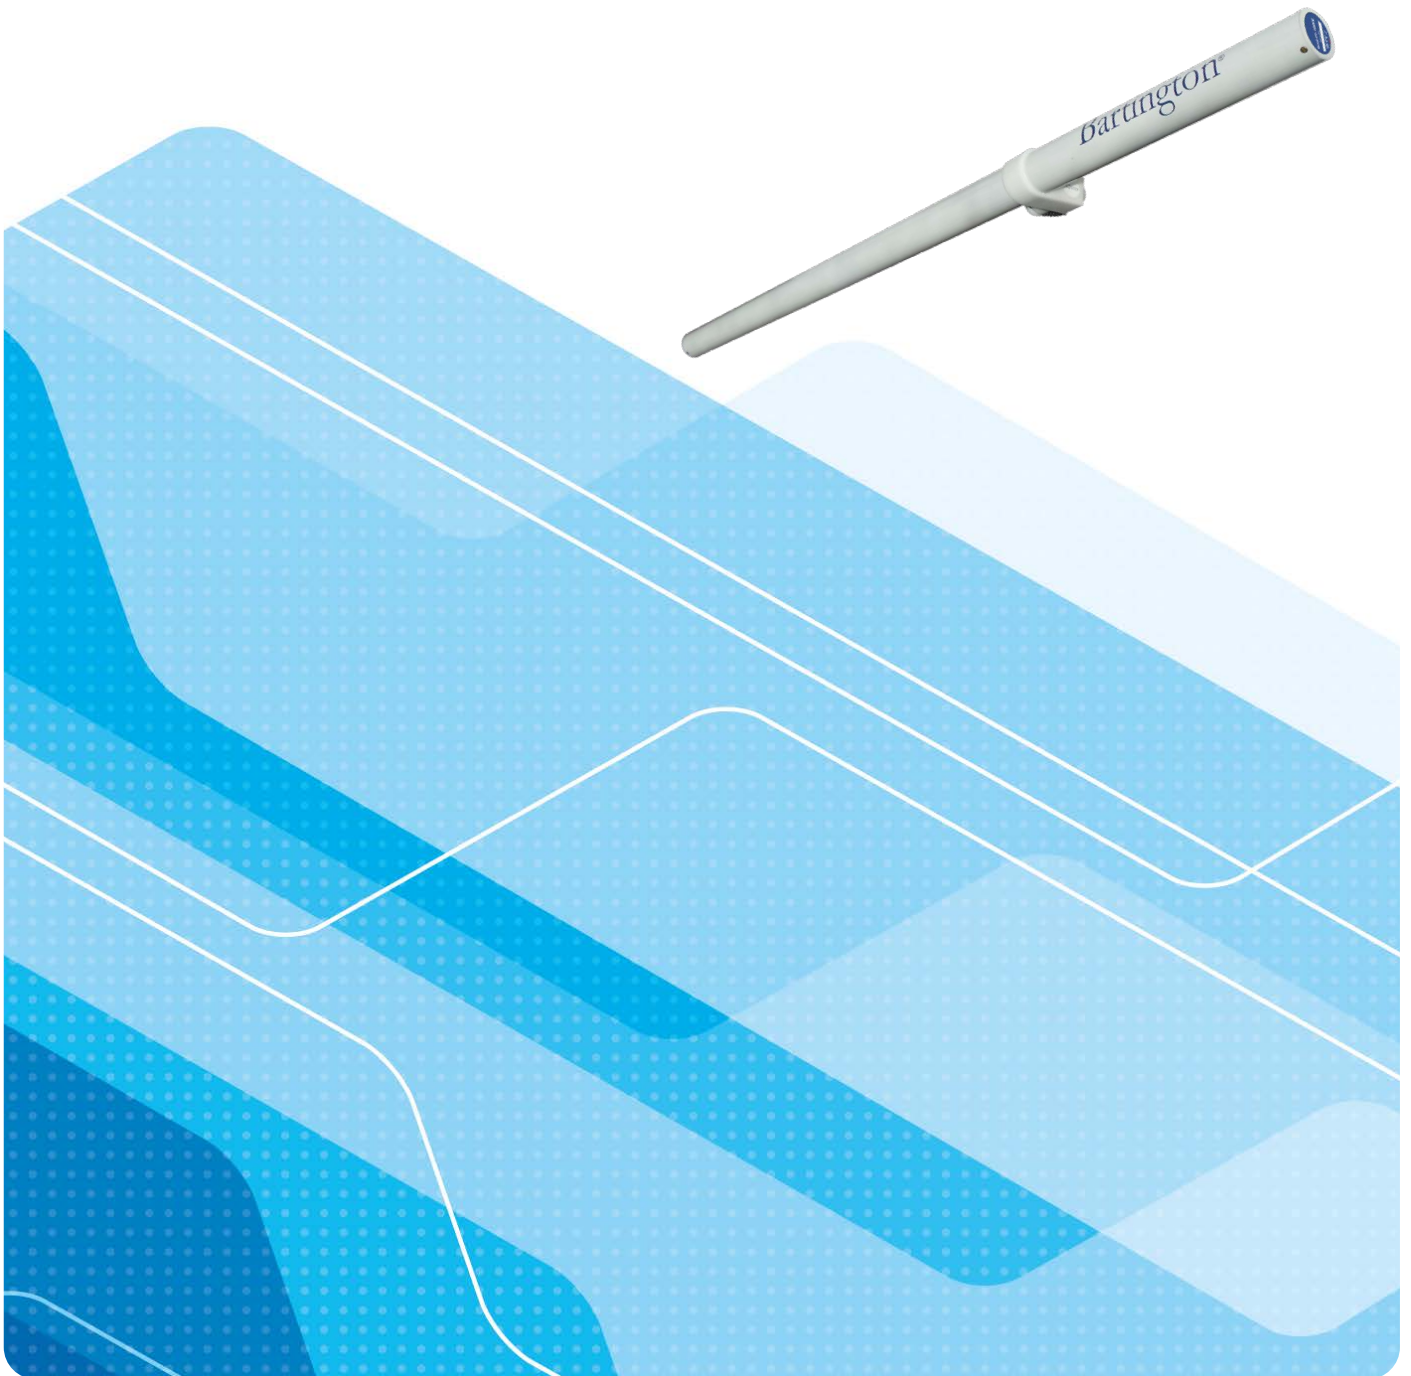

Grad-01-1000L Single Axis Fluxgate Magnetic Gradiometer

The Grad-01-1000L is a vertical component magnetic gradiometer, designed for use alone or as one element in a gradiometer array such as the Grad601 system for rapid data collection over large areas.

The gradiometer contains two fluxgate elements spaced 1m apart, together with the necessary electronics to provide output, housed in a rugged, lightweight 38mm diameter protective tube.

The unit is designed to interface with the DL601 Data Logger to display output and allow background influences to be nulled electronically. The enclosure is clearly labelled with a direction arrow to facilitate orientation during set-up.

Features

- Resolution around 50pT/m
- Bandwidth of DC to 10Hz
- Range of $\pm 100\text{nT/m}$ or $\pm 1000\text{nT/m}$
- Exceptional temperature stability ensures minimal drift
- Each sensor contains electronics and non-volatile memory for calibration data storage
- Can be operated independently, over long cables, if required
- Sealed for operation under wet conditions



Typical applications

- Archaeological and geophysical surveys
- UXO detection
- Integration in multi-sensor instruments



Bartington is a registered trade mark of Bartington Holdings Limited in the following territories: Argentina, Australia, Brazil, Canada, Chile, China, European Union, Hong Kong, Iceland, India, Israel, Japan, Malaysia, Mexico, New Zealand, Norway, Russia, Singapore, South Korea, Switzerland, Taiwan, Turkey, United Kingdom, United States of America, and Vietnam.

Grad-01-1000L Specifications

Performance

Sensor element spacing	1m
Gradient range	$\pm 100\text{nT/m}$ or $\pm 1000\text{nT/m}$ full scale
Output	$\pm 4\text{V}$ full scale, output impedance $1\text{k}\Omega$
Accuracy	$\pm 1\%$
Maximum ambient field	$\pm 100\mu\text{T}$
Noise	100pT pk-pk max.
Differential Drift	$< 0.02\text{nT}/^\circ\text{C}$ (warm up time 2-3 minutes)
Bandwidth	DC to 10Hz min. with -12dB/octave roll off

Environmental


Operating temperature	-20°C to $+70^\circ\text{C}$
-----------------------	--

Mechanical

Size	38mm diameter x 1052mm in length
Weight	0.82kg (1.8lb)
Connector	12 pole Tajimi R04-R12M

Electrical

Power supply	12V nominal (9.5 -18.5V) unregulated, polarity protected
Power supply current	58mA
Pull-up current (pins 5-11)	0.5mA when held low

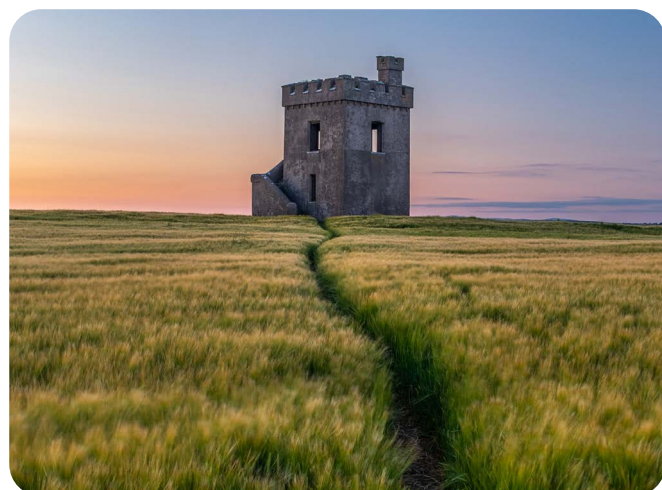

The specifications of the products described in this brochure are subject to change without prior notice.

Bartington Instruments Ltd
5, 8, 10, 11 & 12 Thorney Leys Business Park
Witney, Oxford OX28 4GE. England

Telephone: +44 (0)1993 706565
Email: sales@bartington.com

 **Bartington**[®]
Instruments