

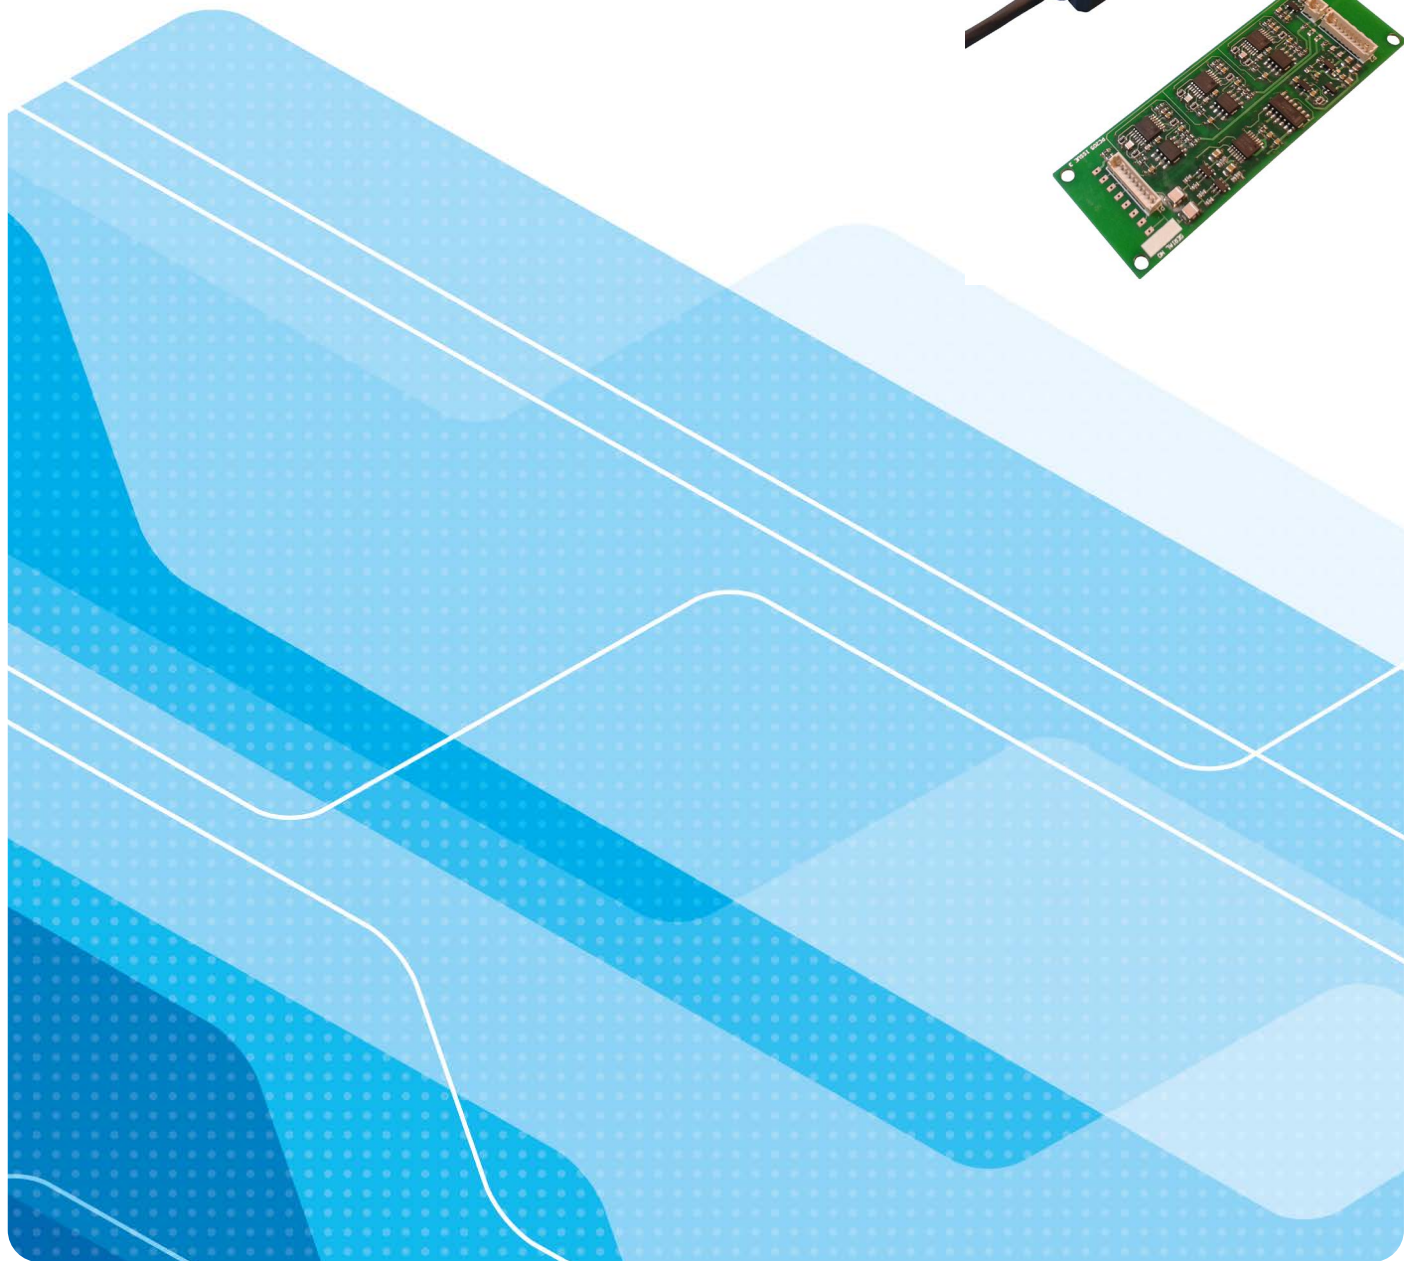


Mag612

Miniature Three-Axis Fluxgate Probe

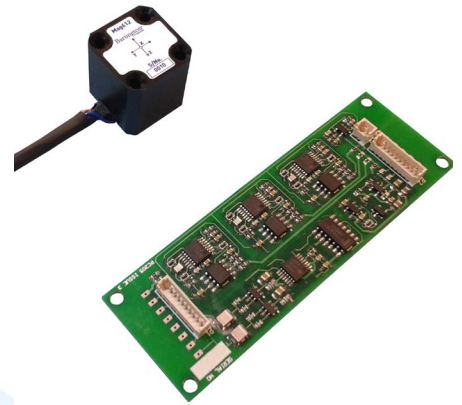


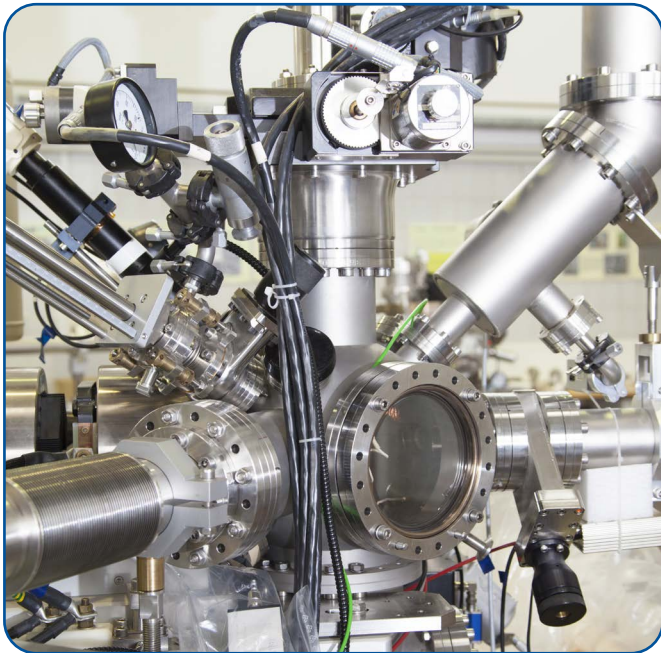

Mag612 Miniature Three-Axis Fluxgate Probe

This miniature fluxgate probe is designed for integration into systems requiring precision measurements where space is limited, such as mobile systems and wearable technologies.

Suitable drive electronics can be provided with this probe. Alternatively, a suitable fluxgate electronics design document is available for customers wishing to design their own electronics.

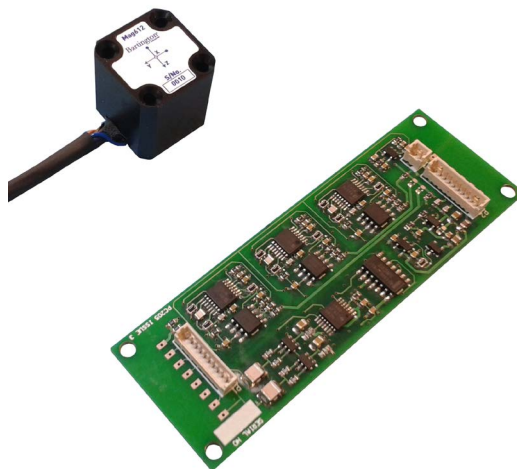

Bartington is a registered trade mark of Bartington Holdings Limited in the following territories: Argentina, Australia, Brazil, Canada, Chile, China, European Union, Hong Kong, Iceland, India, Israel, Japan, Malaysia, Mexico, New Zealand, Norway, Russia, Singapore, South Korea, Switzerland, Taiwan, Turkey, United Kingdom, United States of America, and Vietnam.

Bartington is used under licence by Bartington Instruments Limited.

Mag612 Product Identification

Product name	Code	Item	Noise	Range
Mag612	No code	Probe only	Standard noise	N/A, determined by electronics
	U	Probe + unpackaged electronics	Standard noise (range dependant)	-90 = $\pm 90\mu\text{T}$

Mag612 Probe Features

- Small probe size: 20 x 20 x 20mm
- Narrow noise specification: $\leq 20\text{pTrms}/\sqrt{\text{Hz}}$ at 1Hz

Typical Applications

- Mobile systems
- Wearable technology
- Confined space applications



Mag612U Specifications

Performance	
Number of axes	3 (right-hand XYZ co-ordinate system)
Polarity	+ve = North
Calibration error	<±0.5%
Measuring Range	±90µT
Scaling Temperature Coefficient	<100ppm/°C
Frequency Response	<5% amplitude error DC to 1kHz
Frequency Range	DC – 3kHz minimum within 3dB level
Noise*	≤20pTrms/√Hz @ 1Hz
Zero Field Offset	<±300nT
Offset Temperature Coefficient	<±1nT/°C
Perming (Magnetization hysteresis)	<2nT for exposure to 2x range
Orthogonality error between axes	<0.5°
Alignment to datum face/s	<0.5°
Start-up time	<1 second

*For customs/export purposes may achieve a noise level less than 10pTrms/√Hz @ 1Hz

Environmental	
Operating temperature range	-40°C to +65°C
Storage temperature range	-40°C to +70°C
Compliance (CE, etc.)	EMC BS EN 61326:2013 & RoHS

Mechanical (probe)	
Enclosure Material	Acetal (Black)
Dimensions (Probe head only)	20 x 20 x 20mm
Weight	72g ±7.5g
Connectors	Molex Picoblade 51021-1000
Cable	3 metres long, 8 x 28AWG PVC wires + polyolefin insulation
Mounting Arrangements	4 off mounting holes Ø2.7 Thru' CSK to Ø5

Mechanical (electronics)

Humidity	Not Protected
Output Connector (P2)	Molex 53047-1210 (plus 8 solder pads for direct wiring)
Probe Input Connector (P1)	Molex 53047-1010 (plus 8 solder pads for direct wiring)
Dimensions	90 x 30 x 10mm
Weight	12g \pm 1.5g

Electrical Performance (Drive Electronics – PC218)

Positive supply voltage (range)	+11.0 to 15.5V
Current drawn (max. mA)	47.0mA max (46.0mA at zero field)
Over-voltage protection	none
Reverse polarity protection	none
Current limit	externally limited
Power Supply Noise Rejection Ratio	ripple up to 50mV without any degradation of performance
Negative supply voltage (range)	-11.0 to -15.5V
Current drawn (max. mA)	11.0mA max (10.0mA at zero field)
Over-voltage protection	none
Reverse polarity protection	none
Current limit	externally limited
Power Supply Noise Rejection Ratio	ripple up to 50mV without any degradation of performance
Output Signals X, Y and Z axes	(Magnetic field strength outputs)
Output type	Unbalanced single output
Output Range	\pm 8V at full scale
Output Impedance	10 Ω nominal
Maximum load capacitance (C _{LOAD})	>1000pF without oscillation
Over-voltage protection	none
Reverse polarity protection	none
Breakthrough	<50mVpk-pk at 16kHz



Mag612 Probe Specifications

Performance	The following performance specifications are dependant on the drive electronics used. Where information has been provided, it has been tested and validated using Bartington's own drive electronics, and so is deemed "achievable".
Number of axes	3 (right-hand XYZ co-ordinate system)
Polarity	+ve = North
Measuring range	<±1000µT
Output scaling (feedback)	104µT/mA typical
Scaling temperature coefficient	<100ppm/°C
Frequency Response	<5% amplitude error DC to 1kHz
Frequency Range	DC – 3kHz minimum within 3dB level
Primary resistance (per axis)	7.5Ω ±20%
Primary Inductance (per axis)	650µH ±20%
Secondary Resistance (per axis)	44.5Ω ±20%
Secondary Inductance (per axis)	5.1mH ±20%
Recommended Excitation Frequency	16kHz nominal
Recommended Excitation Drive Current	75mA Peak AC-coupled
Noise*	<20pTrms/√Hz @ 1Hz
Zero Field Offset	<±300nT
Offset Temperature Coefficient	<±1nT/°C
Orthogonality error between axes	<3°
Alignment to datum face/s	<3°

*For customs/export purposes may achieve a noise level less than 10pTrms/√Hz @ 1Hz

Environmental

Operating temperature range	-40°C to +65°C
Storage temperature range	-40°C to +70°C
Compliance (CE, etc.)	EMC BS EN 61326:2013 & RoHS

Mechanical

Construction	Potted enclosure with 3 metre potted-in cable
Enclosure Material	Acetal (Black)
Dimensions (Probe head only)	20 x 20 x 20mm
Weight	72g \pm 7.5g
Connectors	Molex Picoblade 51021-1000
Cable	3 metres long, 8 x 28AWG PVC wires + polyolefin insulation
Mounting Arrangements	4 off mounting holes Ø2.7 Thru' CSK to Ø5



The specifications of the products described in this brochure are subject to change without prior notice.

Bartington Instruments Ltd
5, 8, 10, 11 & 12 Thorney Leys Business Park
Witney, Oxford OX28 4GE. England

Telephone: +44 (0)1993 706565
Email: sales@bartington.com

 **Bartington**[®]
Instruments